

INLAY
AIS 520

MARINATED PRODUCTS CLEAN, HYGIENIC, EFFICIENT.
JUST PERFECT!



INLAY AIS 520


Technical Data

Tray formats
Min. 120 x 120 x 30 / 13 mm [L x W x H]

Tray output (per Modul)
Max. 40 per minute
(by continuous loading)
Extendable up to approx. 2 Modul

Electrical connection
3x 400 V /N/PE, 32 A
Connection power approx. 2,5 kW

Compressed air
6 to 8 bar (dry, oil free)
Consumption approx. 13,7 m³/h, at around 40
trays per minute

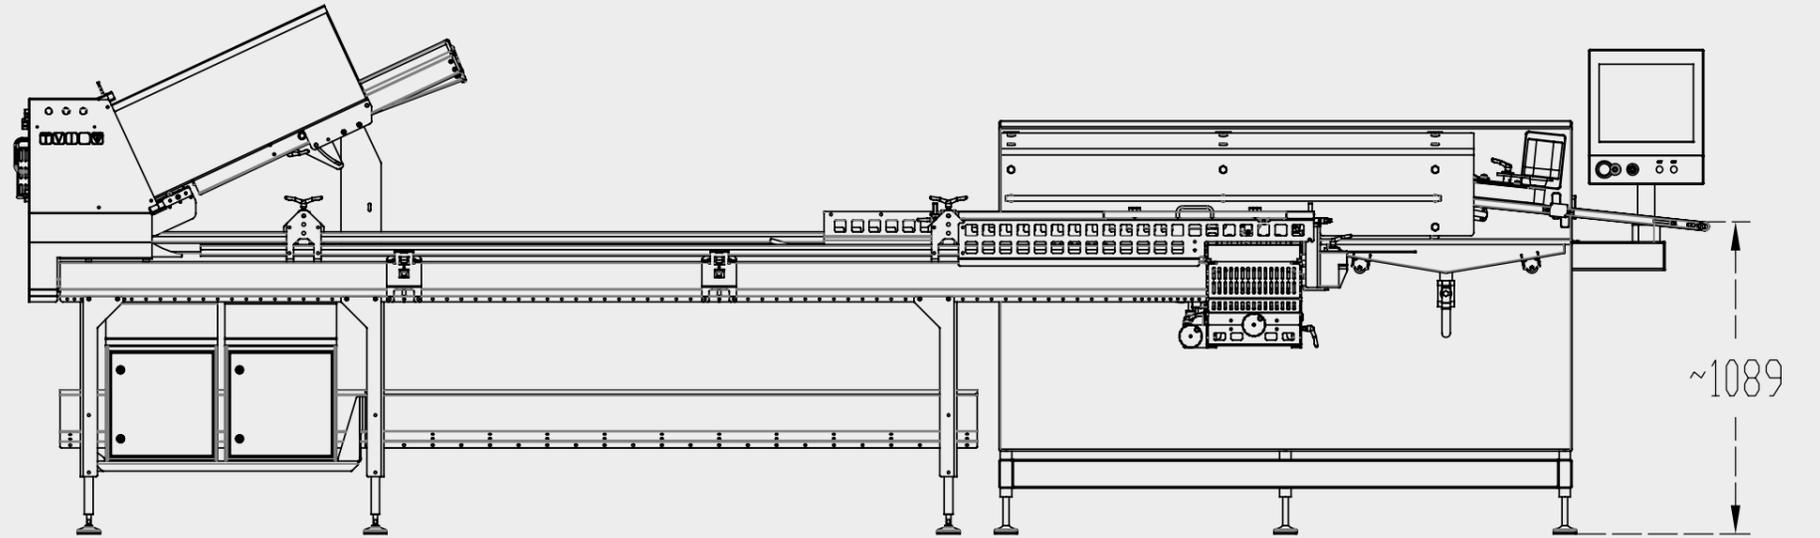

Mode of operation

The AIS 520, stacks or shingles marinated or non-marinated slices and then places these into the trays without dripping thanks to a patented, movable loading system.

IMPRESSIVE TECHNOLOGY

- Maximum productivity and hygiene
- Exzellente Produktqualität
- Simple operation
- Perfect sealing protection
- Integrated tray denester TDS 300
- Maximum flexibility thanks quick and easy diy changes

